

CURTAIN



0.4mm continuous pressed square-line steel curtain.

SIZE

	MINIMUM	MAXIMUM
HEIGHT	1250mm	3000mm
WIDTH	940mm	3150mm

BOTTOM RAIL

Aluminium bottom rail with weatherseal.

Taper: Optional. To maximum 3150mm (w). Minimum taper ratio is 1:150. Maximum taper ratio is 1:10, with maximum total taper 290mm.

GUIDES

Supplied with 25mm galvanised guides.

Rubber coated guide stops to prevent metal on metal contact.

Guide blocks with double rollers for smooth, quiet operation.

Windlocking: Optional.

DRUM

Castalated steel drum and mini groove top sheet reduces paint scuffing and promotes ease of operation.

SPRINGS

Spring life designed for 20,000 cycles.

OPERATION

Nylofelt® minimises friction, ensures continuous smooth, quiet operation for a minimum of 20,000 cycles.

Doors can be operated manually.

Sturdy metal D shaped lifting handle, with pull rope fitted for manual operation.

BRACKETS

Galvanised steel.

LOCKING

Selection of locking systems, including:

- easy lift
- waist height mounted locks
- overlock capabilities
- stainless steel lock.

FINISHES

Extensive range of standard Colorbond® colours, Zinalume® and several special self storage complex special colours. .

OPTIONS

Ventilation: Optional. Slotted.


Mullions: Optional

Personnel access: No.


Head infill panels: Optional

Head seal kit: Optional.

CLEARANCES

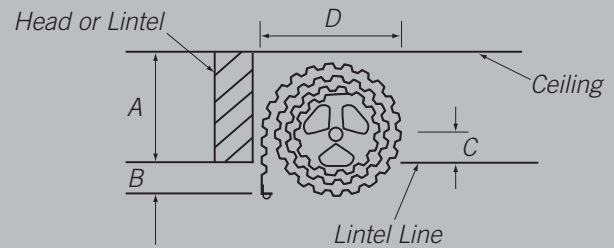

Door Roll Obtrusion

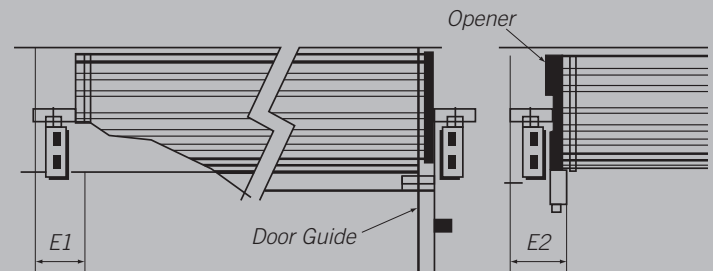

(Drawings not to scale)

DIMENSIONS

HEIGHTS	INSTALLATION CLEARANCES								
	HEADROOM (mm)				SIDEROOM (mm)				
	RECOMMENDED			RESTRICTED	E1		E2		
	A	B	C	D	A	C	LH	RH	
Series 1 Up to 2400	370	80	120	480	335	100	100	140	155